

Suresafe™ VS-123 Mini Wireless Camera Hunter

900 MHz - 3.0 GHz, 5.0 – 6.0 GHz Full band video scanner

Made for general use, no need of professional electronic training or knowledge

This new mini video scanner receives and display video signal of 1.2 GHz - 2.4 GHz - 5.8 GHz three frequency bands wireless camera. Its effective distance is up to 200 feet (depending on output power of source transmitter). **VS-123 Mini Wireless Camera Hunter** is easy to use as 1-2-3. It does not require complicated installation or any professional knowledge.

- Scan 1.2G - 2.4G - 5.8G three frequency bands cyclic within 18 seconds for one cycle
- 2.5" LCD Monitor, Color and B/W cameras are compatible
- Indicate frequency of scanned image
- Three LED indicates the scanning status of 3 frequency bands individually
- Video protocol auto-switching for NTSC, PAL and SECAM
- Lock function can latch or release the image.
- **"Fine Tuning"** switches for mending screen image
- 3.5mm Video/Audio output jack for recording the scanned video and audio
- AAA / UM-4 dry battery or rechargeable battery both available
- Earphone hear the voice if there is audio signal with the wireless camera signal
- Support external power bank to extend the working time



Specifications:

Dimension	L 11.6 x W 7 x T 3.3 cm (including antenna: L 19 cm)
Weight	about 215g (not include battery)
Power	1. Switching power adaptor 2. AAA / UM-4 dry battery or rechargeable battery 3. Support external power bank (5V 1.5A and more)
Battery life	About 2 hours after full charge
Detecting Frequency	900 MHz – 3.0 GHz, 5.0 – 6.0 GHz
Operation mode	Auto – Lock – Manual fine tune
Scan indication	Image and frequency of scanned video signal
Warning mode	1. Beep and vibration 2. Silent detection through earphone
Scanning band	1.2 GHz - 2.4 GHz - 5.8 GHz three bands cycle scanning
Detecting Distance	up to 200 feet (depending on output power of source transmitter)

* Specification may change without notice.


Suresafe™ VS-123 Mini Wireless Camera Hunter

900 MHz - 3.0 GHz, 5.0 - 6.0 GHz Full band video scanner

VS-123 Main Parts



No.	Description
1	1.2G - 2.4G Antenna
2	5.8G Antenna
3	2.5 inches LCD
4-1	Scan band indication
4-2	Scan / Lock

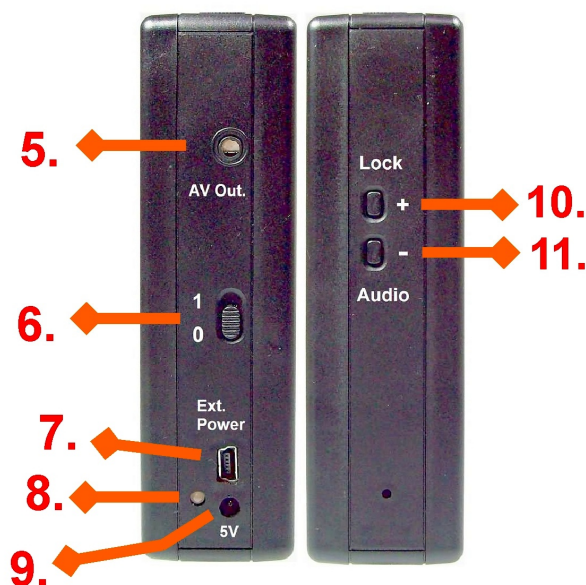

No.	Description
5	Earphone / AV Output
6	Power
7	External power from Power bank 5V 1.5A
8	Red - Fast charging Green - Slow charging
9	Switching power adaptor input jack
10	Lock / Unlock Fine tune +
11	Audio band / Fine tune -

Suresafe™ VS-123 Mini Wireless Camera Hunter

900 MHz - 3.0 GHz, 5.0 – 6.0 GHz Full band video scanner

FEATURES

1. Easy and direct use, no annoy software setting

There are 2 rows LED displays under the LCD screen.

- 1.1 The upper row is **scanning band** indication and **battery low** wiring. Three blue LEDs indicate 1.2GHz - 2.4GHz - 5.8GHz three frequency bands individually for user to know the scanning status clearly. The LED at right side is battery low indication, it will go red when battery power runs down.
- 1.2 The lower row is indication of **scanning** and **image lock**. During scanning, the green LEDs will shuttle to-and-fro. When receive video signal, user can lock the image, then green LED will still.

2. Audio frequency band

Many wireless cameras have audio with the video signal. VS-123 has audio demodulation of 6.0 MHz and 6.5 MHz covering most wireless cameras.

3. Power saving

VS-123 is designed with power saving circuit. The screen will shut down automatically if do not receive video signal. The power consumption in scanning mode is 400mA per hour. If use 800mA rechargeable battery, can last for 2 hours after full charged.

4. Dry battery / Rechargeable battery both available

VS-123 can use both dry battery and rechargeable battery which is convenient to buy in shops of any country.

5. Support of Power bank

VS-123 has a USB port for connecting with power bank to extend the working time in outdoors. A 7000mA power bank can last for continuous scan about 15 hours.

6. Frequency indication

VS-123 will display the image with its frequency when receive video signal.

7. AV output / Earphone

VS-123 has an AV output jack for recording, or to connect with earphone for silent detection.

Siangsiu Industrial Corp. / Suresafe Technology Inc.
11F-1, No. 29, Sec. 3, Roosevelt Road, Taipei, Taiwan 106
Tel: (886 2) 23626787 Fax: (886 2) 23625057
Email: siangsiu@ms3.hinet.net Web: www.suresafe.com.tw